

NOTES: (UNLESS OTHERWISE SPECIFIED)




1. EXCEPT AS NOTED, DIMENSIONS ARE IN MILLIMETERS.
2. MARK WEIGHT (2.5 MT) WITH WHITE LETTERS 150mm HIGH.

3. TO BE MACHINED.

4. COAT WITH AISC CLASS A COATING FOR SLIP-CRITICAL CONNECTIONS.

**1.88"-12 UN TAP FOR
1.50"-6 UNC INSERT
2.00" DEEP MIN
6X**

VIEW A-A
ROTATED 30 DEGREES CCW

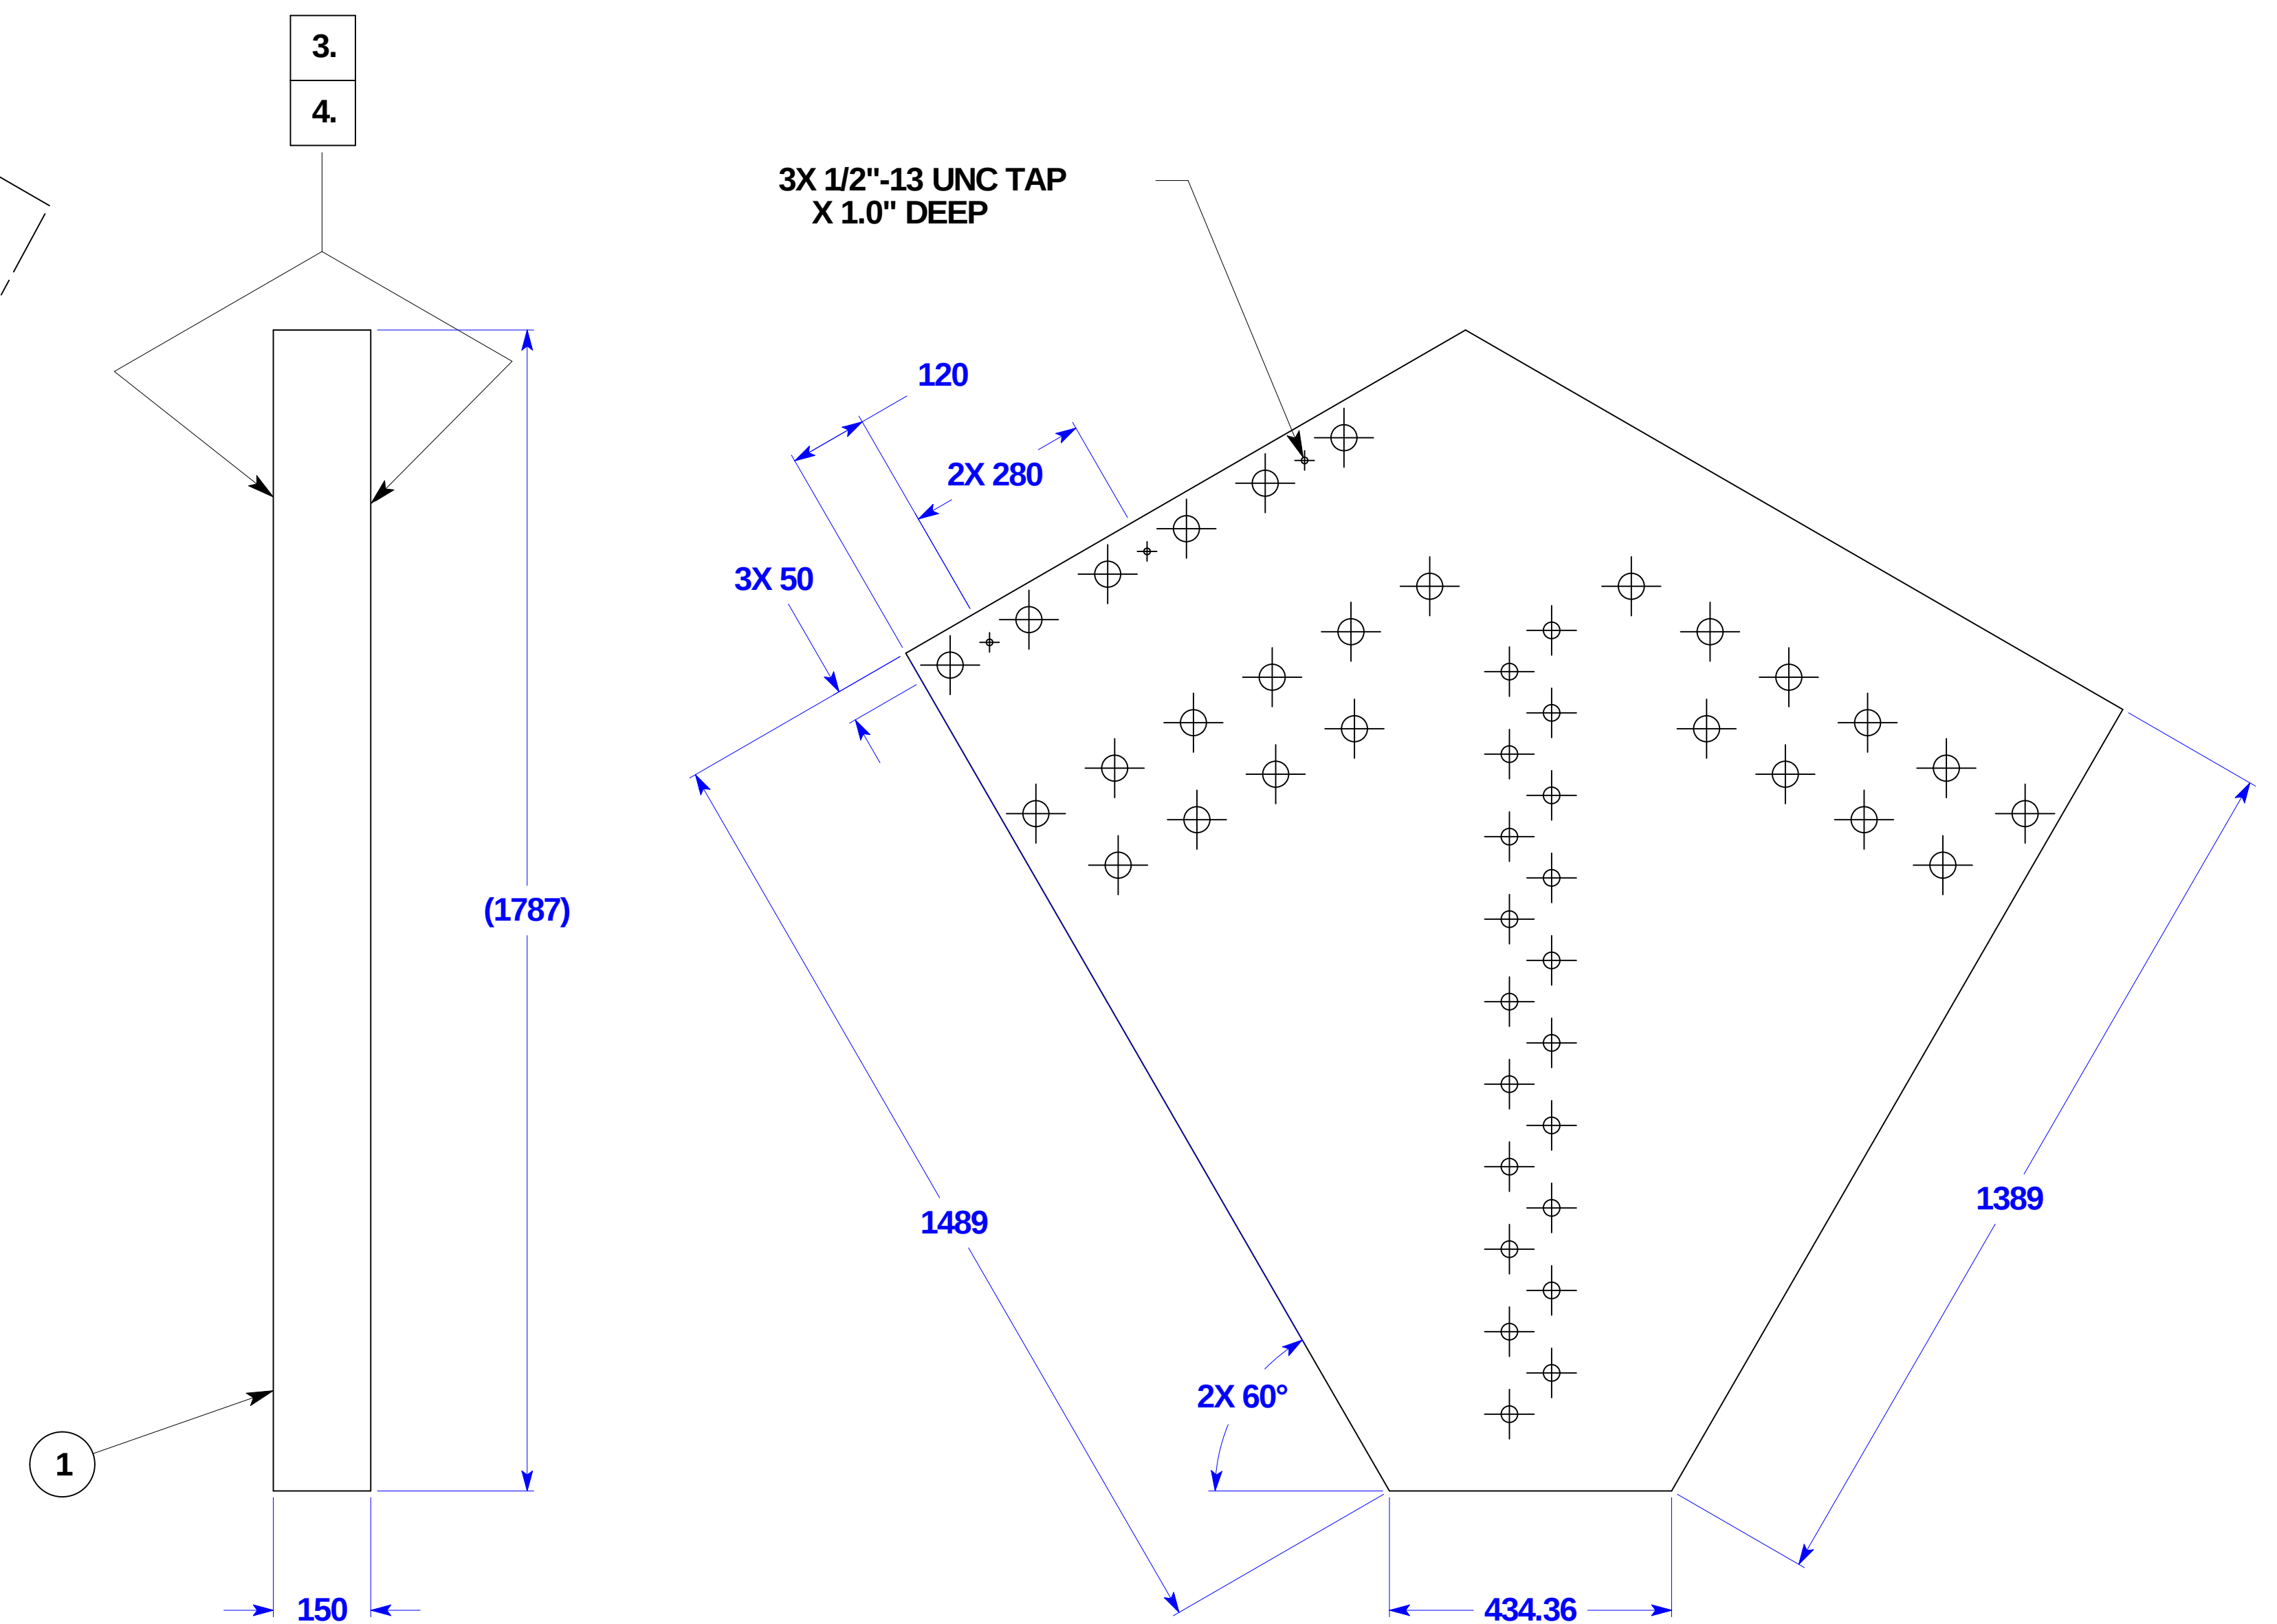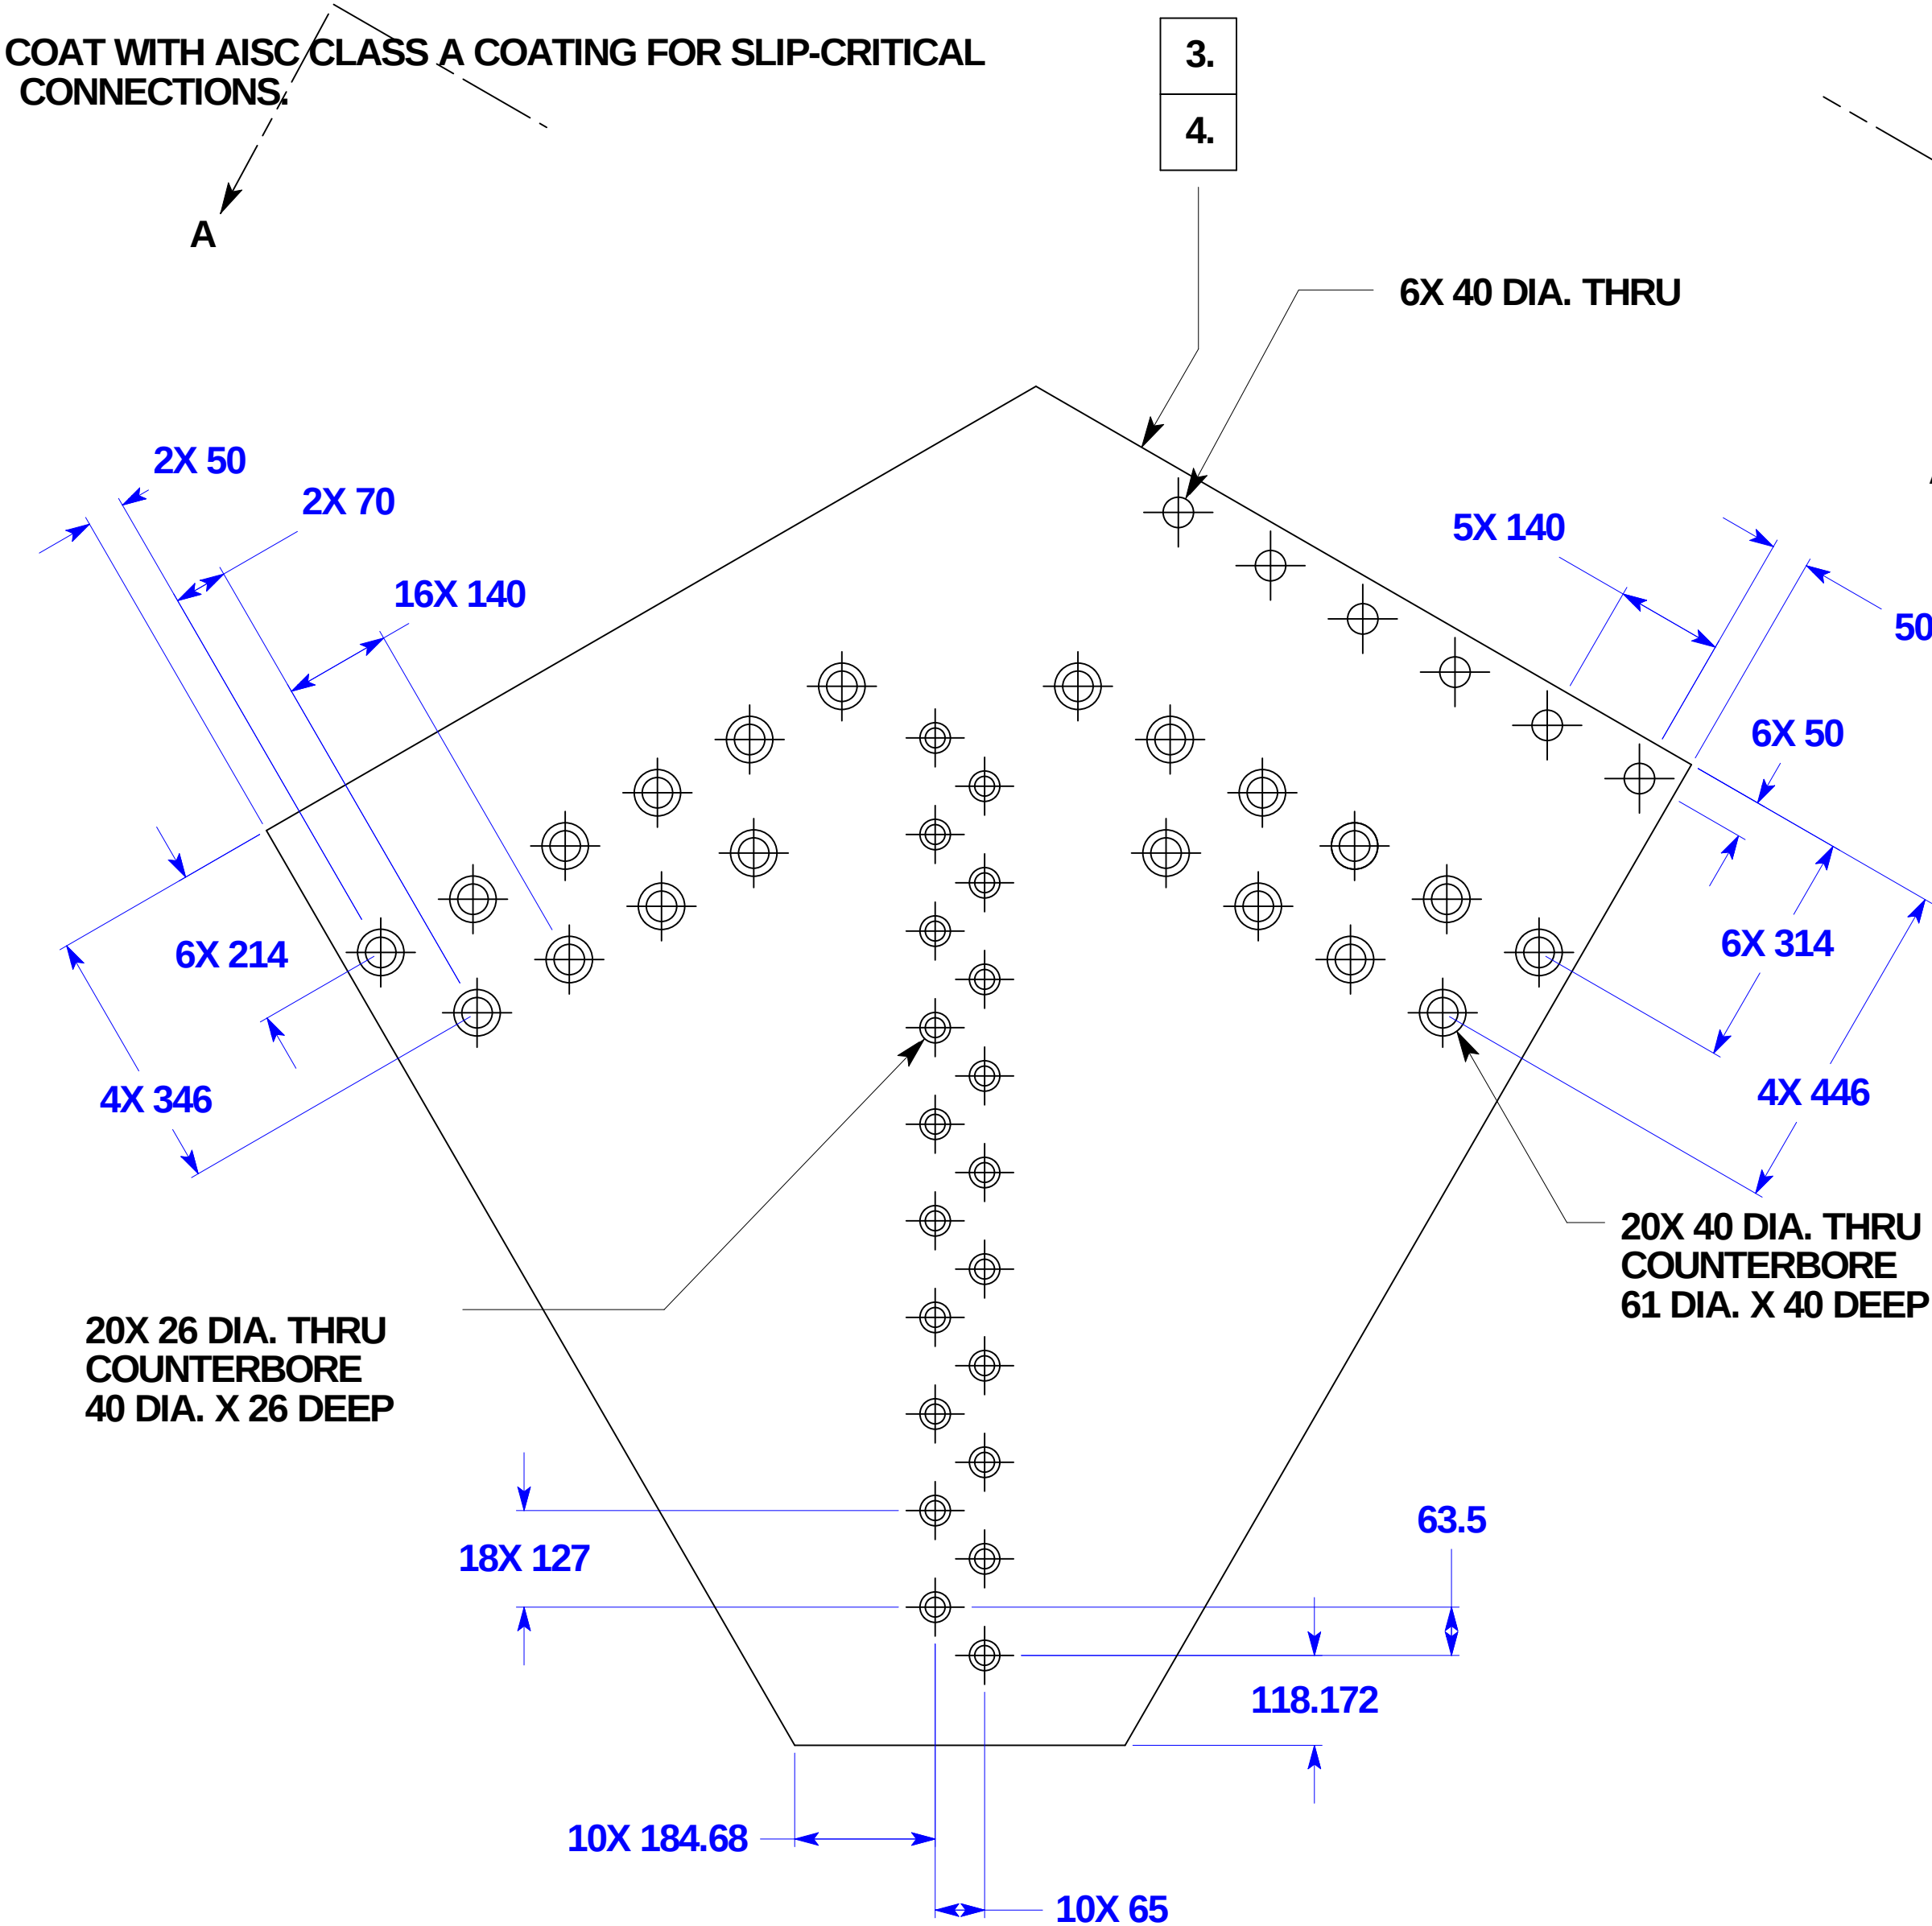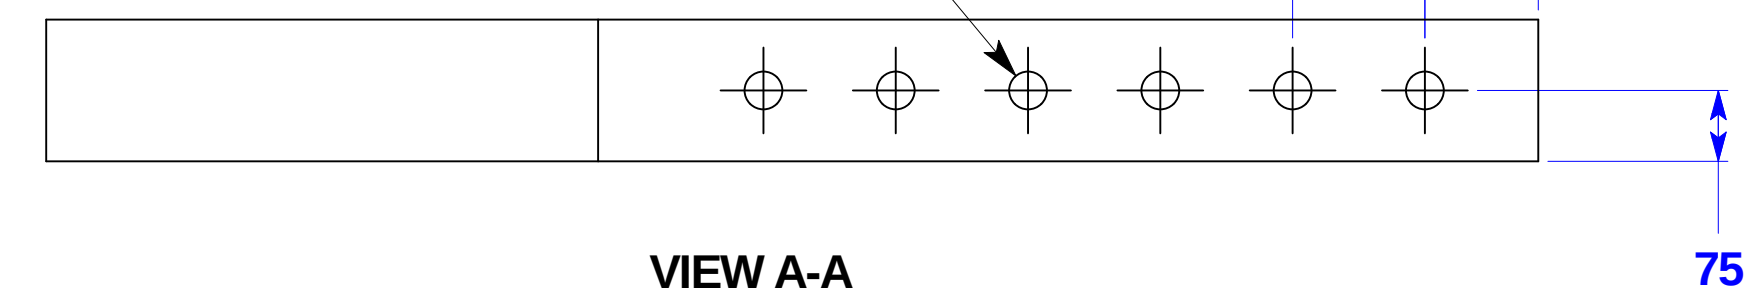

2	-	-	-	KEENSERT CL-1126-KS	6
1	-	-	-	BAR,STL,1874mm X 1787mm X 150mm	1
ITEM No	PREF	BAS	SUFF	TITLE OR DESCRIPTION	QTY
		STOCK OR PART NO			

		DIMENSIONING AND TOLERANCING IS IN ACCORDANCE WITH ANSI Y14.5M-1982.		SCALE 1:8		DO NOT SCALE DRAWING		CAD FILE NAME: PF35062014.P0		Y	
		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCES BREAK EDGES .005-.015 INTERNAL CORNERS .015 R MAX FRACTIONS $\frac{1}{2}$ --- DEC .XX $\frac{1}{10}$ --- .XXX $\frac{1}{100}$ --- .XXXX $\frac{1}{1000}$ --- ALL SURFS		STANFORD LINEAR ACCELERATOR CENTER U.S. DEPARTMENT OF ENERGY STANFORD UNIVERSITY STANFORD, CALIFORNIA				BABAR DETECTOR BARREL FLUX RETURN CORNER GAP PL, SPL LT			
SA-350-620-00				PROPRIETARY DATA OF STANFORD UNIVERSITY AND/OR U. S. DEPARTMENT OF ENERGY. RECIPIENT SHALL NOT PUBLISH THE INFORMATION WITHIN UNLESS GRANTED SPECIFIC PERMISSION OF STANFORD UNIVERSITY.							
NEXT ASSEMBLIES:				ENGR R F BOYCE 1/24/96 DRW R F BOYCE 1/24/96 CHKD H J KREBS 3/21/96				APPROVAL S R A BELL 3/22/96 H L L YNCH 3/22/96 T O'CONNOR 3/22/96			
								PF-350-620-14 PO D			

BBR BRRL FLX RTN CNR GAP SPL LT