


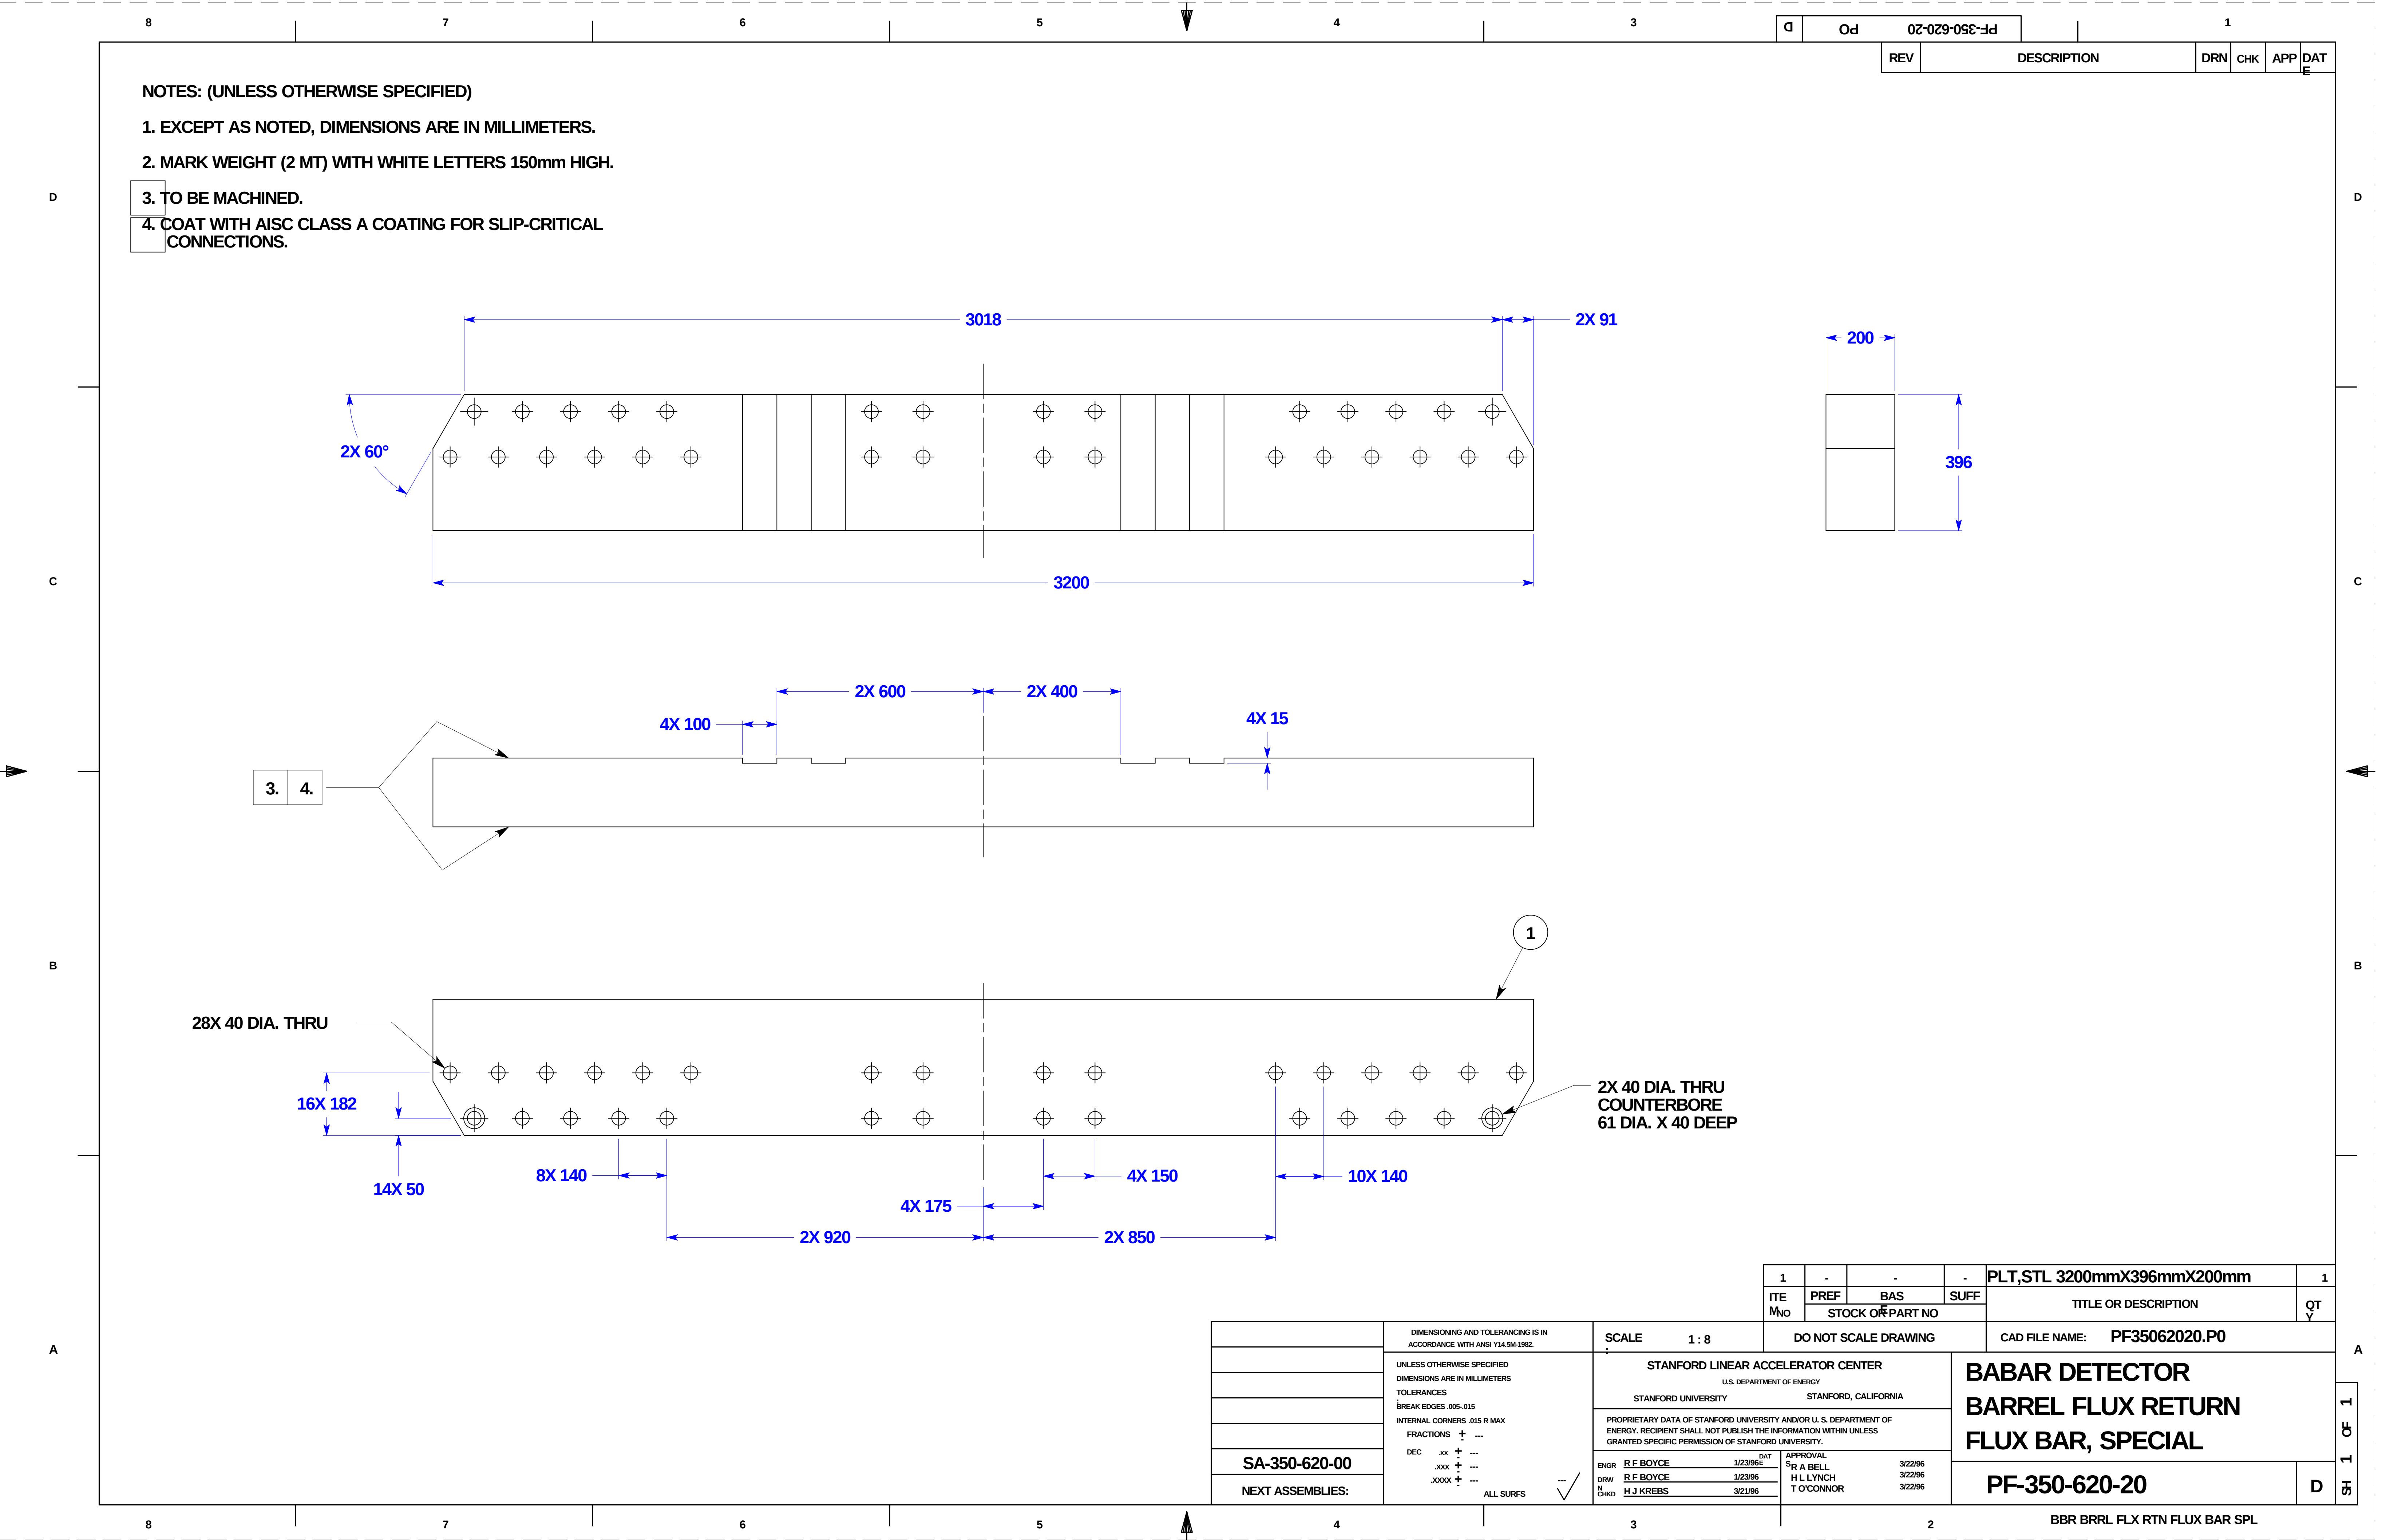

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. EXCEPT AS NOTED, DIMENSIONS ARE IN MILLIMETERS.

2. MARK WEIGHT (2 MT) WITH WHITE LETTERS 150mm HIGH.

3. TO BE MACHINED.

4. COAT WITH AISC CLASS A COATING FOR SLIP-CRITICAL CONNECTIONS.

1	-	-	-	PLT,STL 3200mmX396mmX200mm	1
ITEM No	PREF	BAS	SUFF	TITLE OR DESCRIPTION	QTY
	STOCK OR PART NO				

DIMENSIONING AND TOLERANCING IS IN ACCORDANCE WITH ANSI Y14.5M-1982.		SCALE 1 : 8	DO NOT SCALE DRAWING	CAD FILE NAME: PF35062020.P0	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCES BREAK EDGES .005-.015 INTERNAL CORNERS .015 R MAX FRACTIONS + --- DEC .XX + --- .XXX + --- .XXXX + --- ALL SURFS		STANFORD LINEAR ACCELERATOR CENTER U.S. DEPARTMENT OF ENERGY STANFORD UNIVERSITY STANFORD, CALIFORNIA		BABAR DETECTOR BARREL FLUX RETURN FLUX BAR, SPECIAL	
SA-350-620-00		PROPRIETARY DATA OF STANFORD UNIVERSITY AND/OR U. S. DEPARTMENT OF ENERGY. RECIPIENT SHALL NOT PUBLISH THE INFORMATION WITHIN UNLESS GRANTED SPECIFIC PERMISSION OF STANFORD UNIVERSITY.		PF-350-620-20	
NEXT ASSEMBLIES:		ENGR R.F. BOYCE 1/23/96 DRW R.F. BOYCE 1/23/96 CHK H.J. KREBS 3/21/96	APPROVAL SR A BELL 3/22/96 H.L. LYNCH 3/22/96 T O'CONNOR 3/22/96	D	

BBR BRRL FLX RTN FLUX BAR SPL