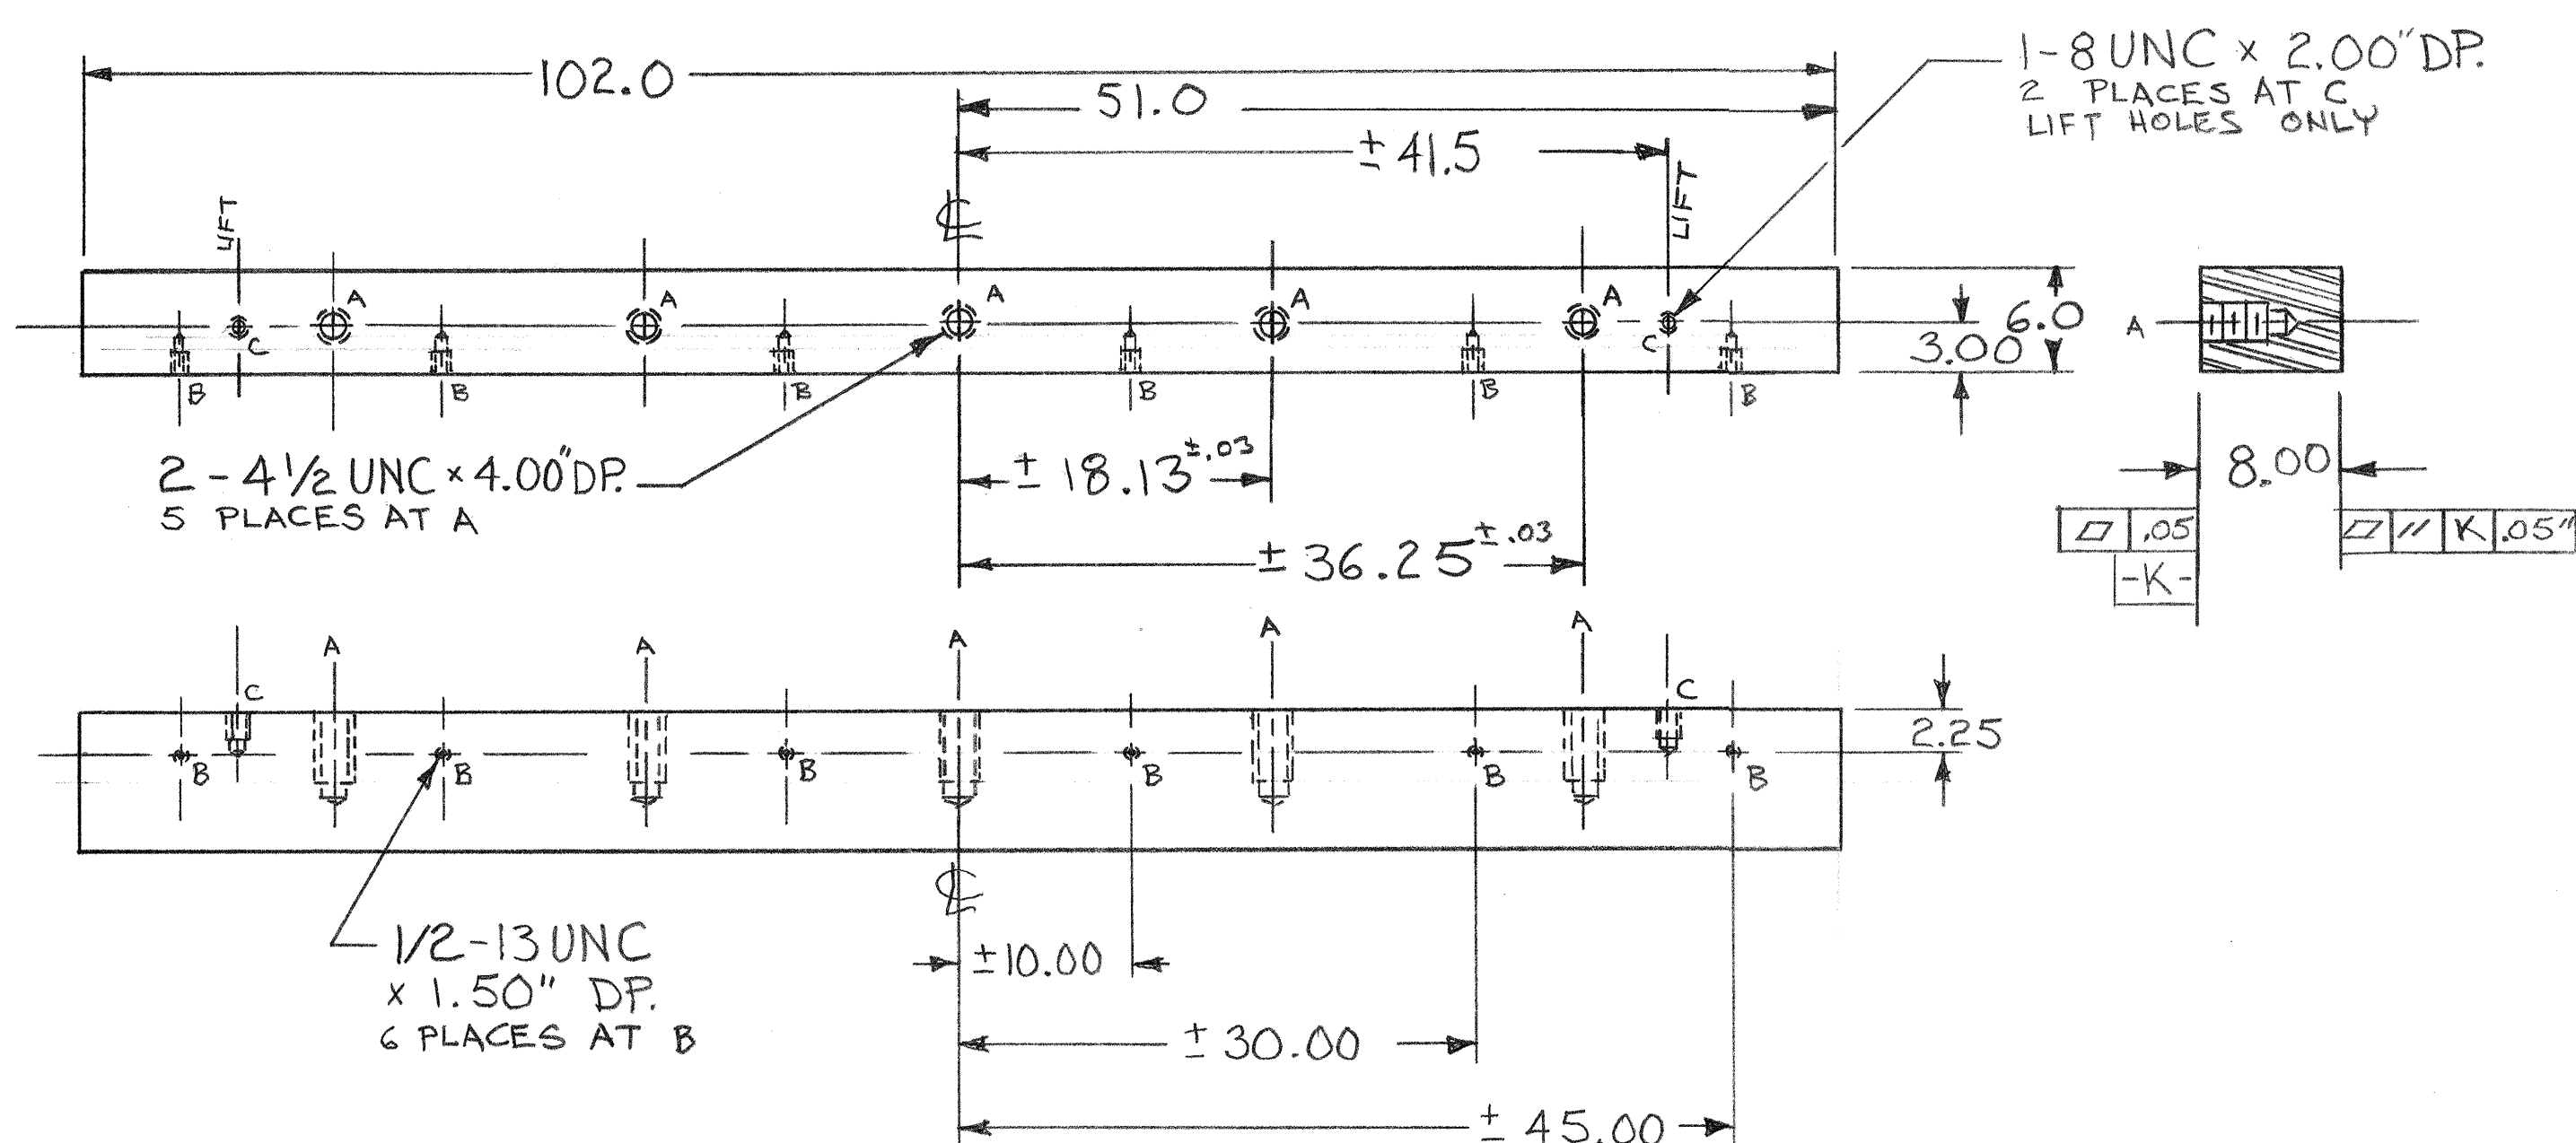
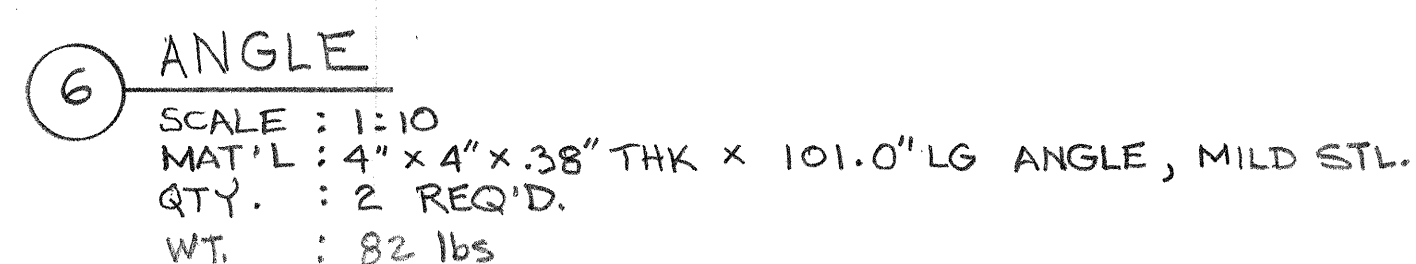
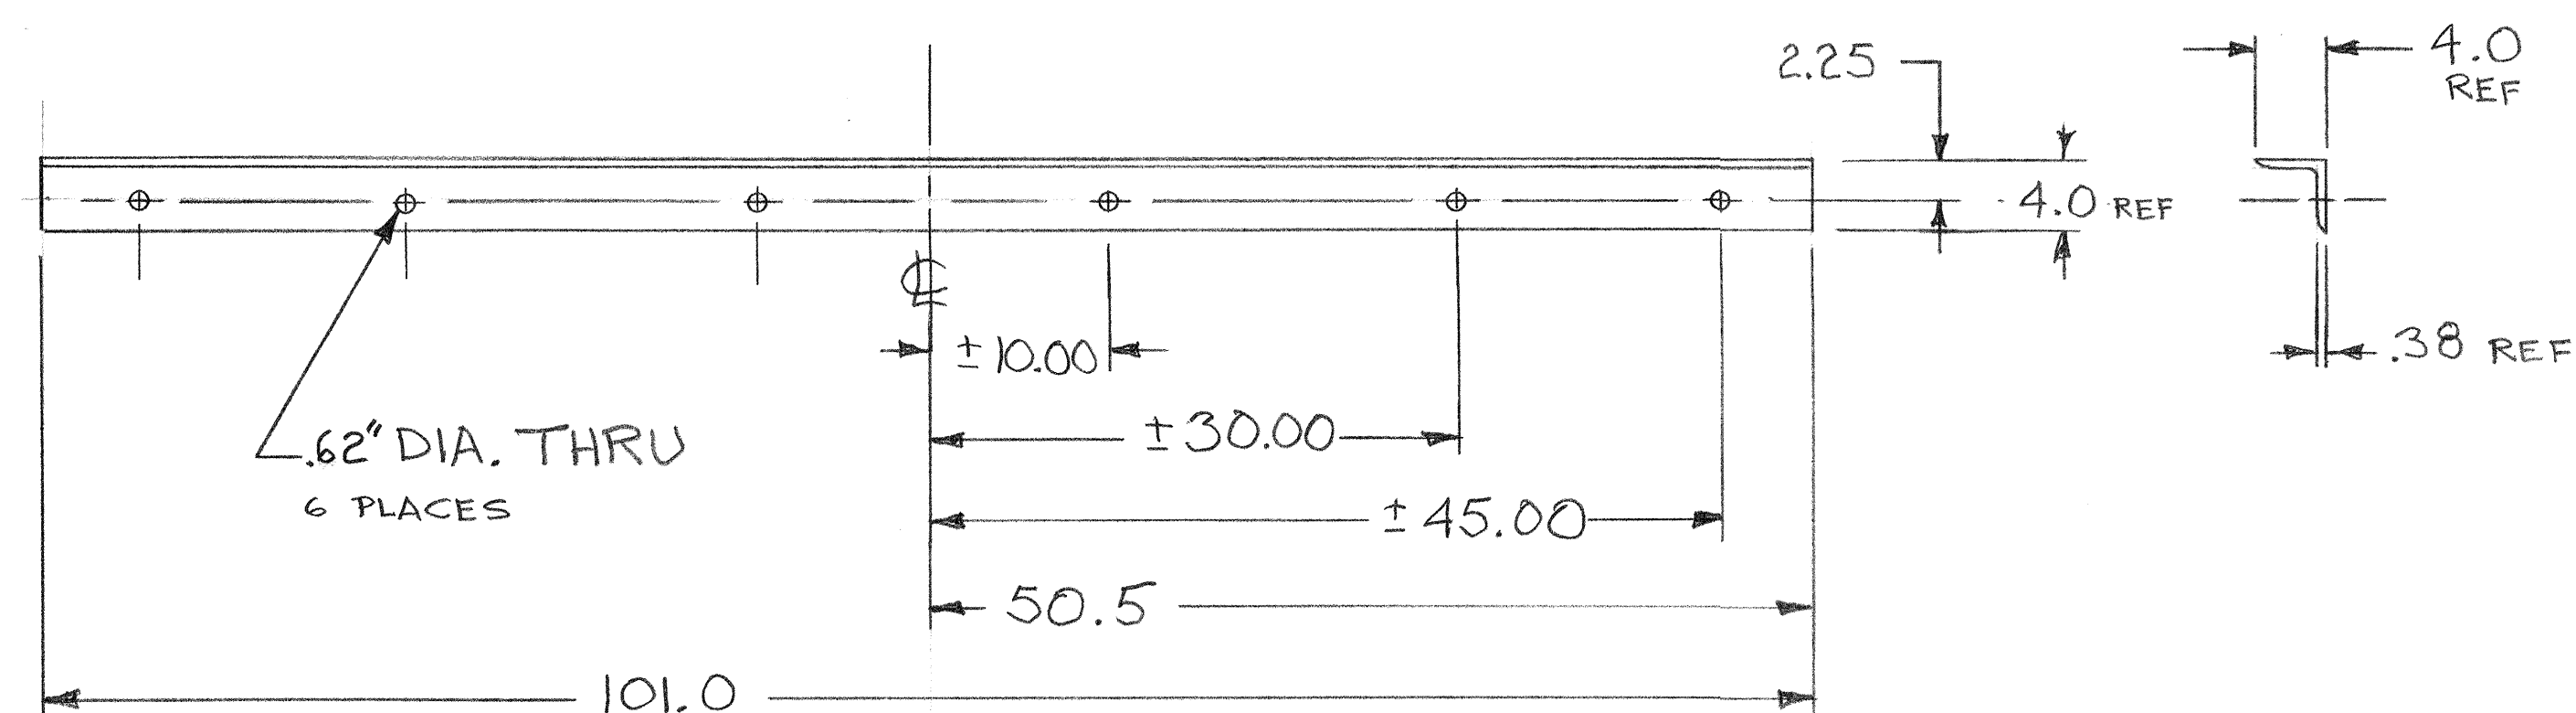
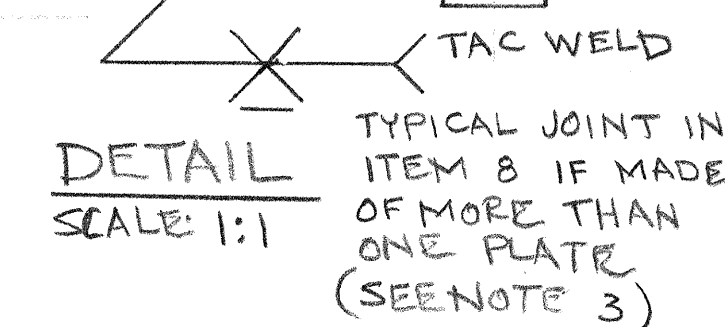
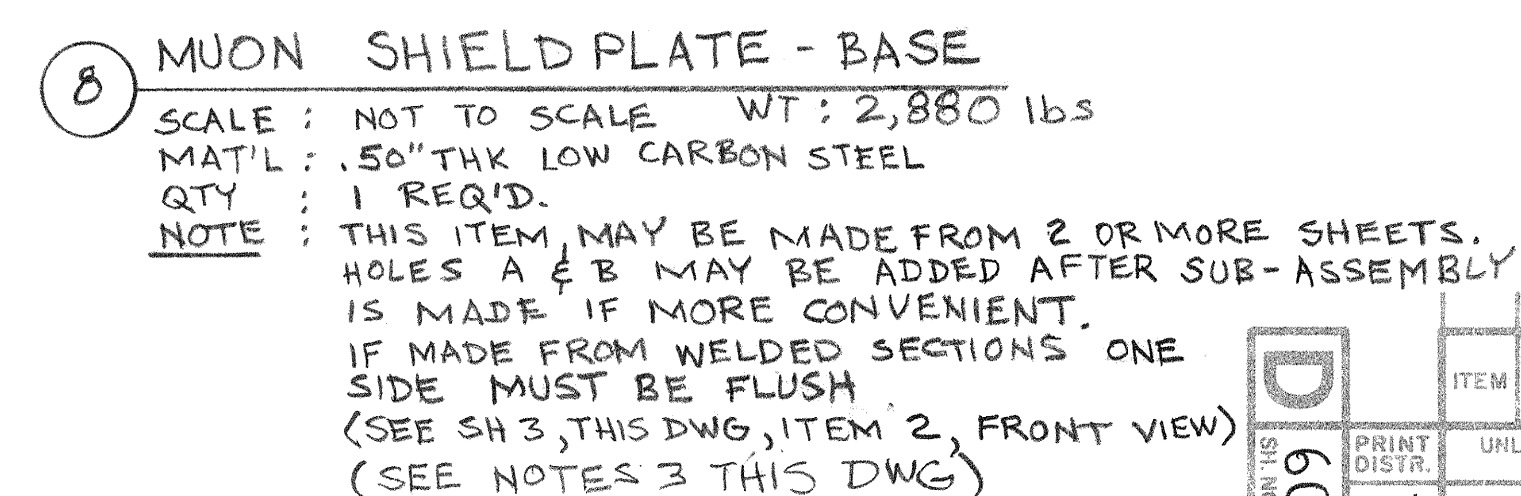
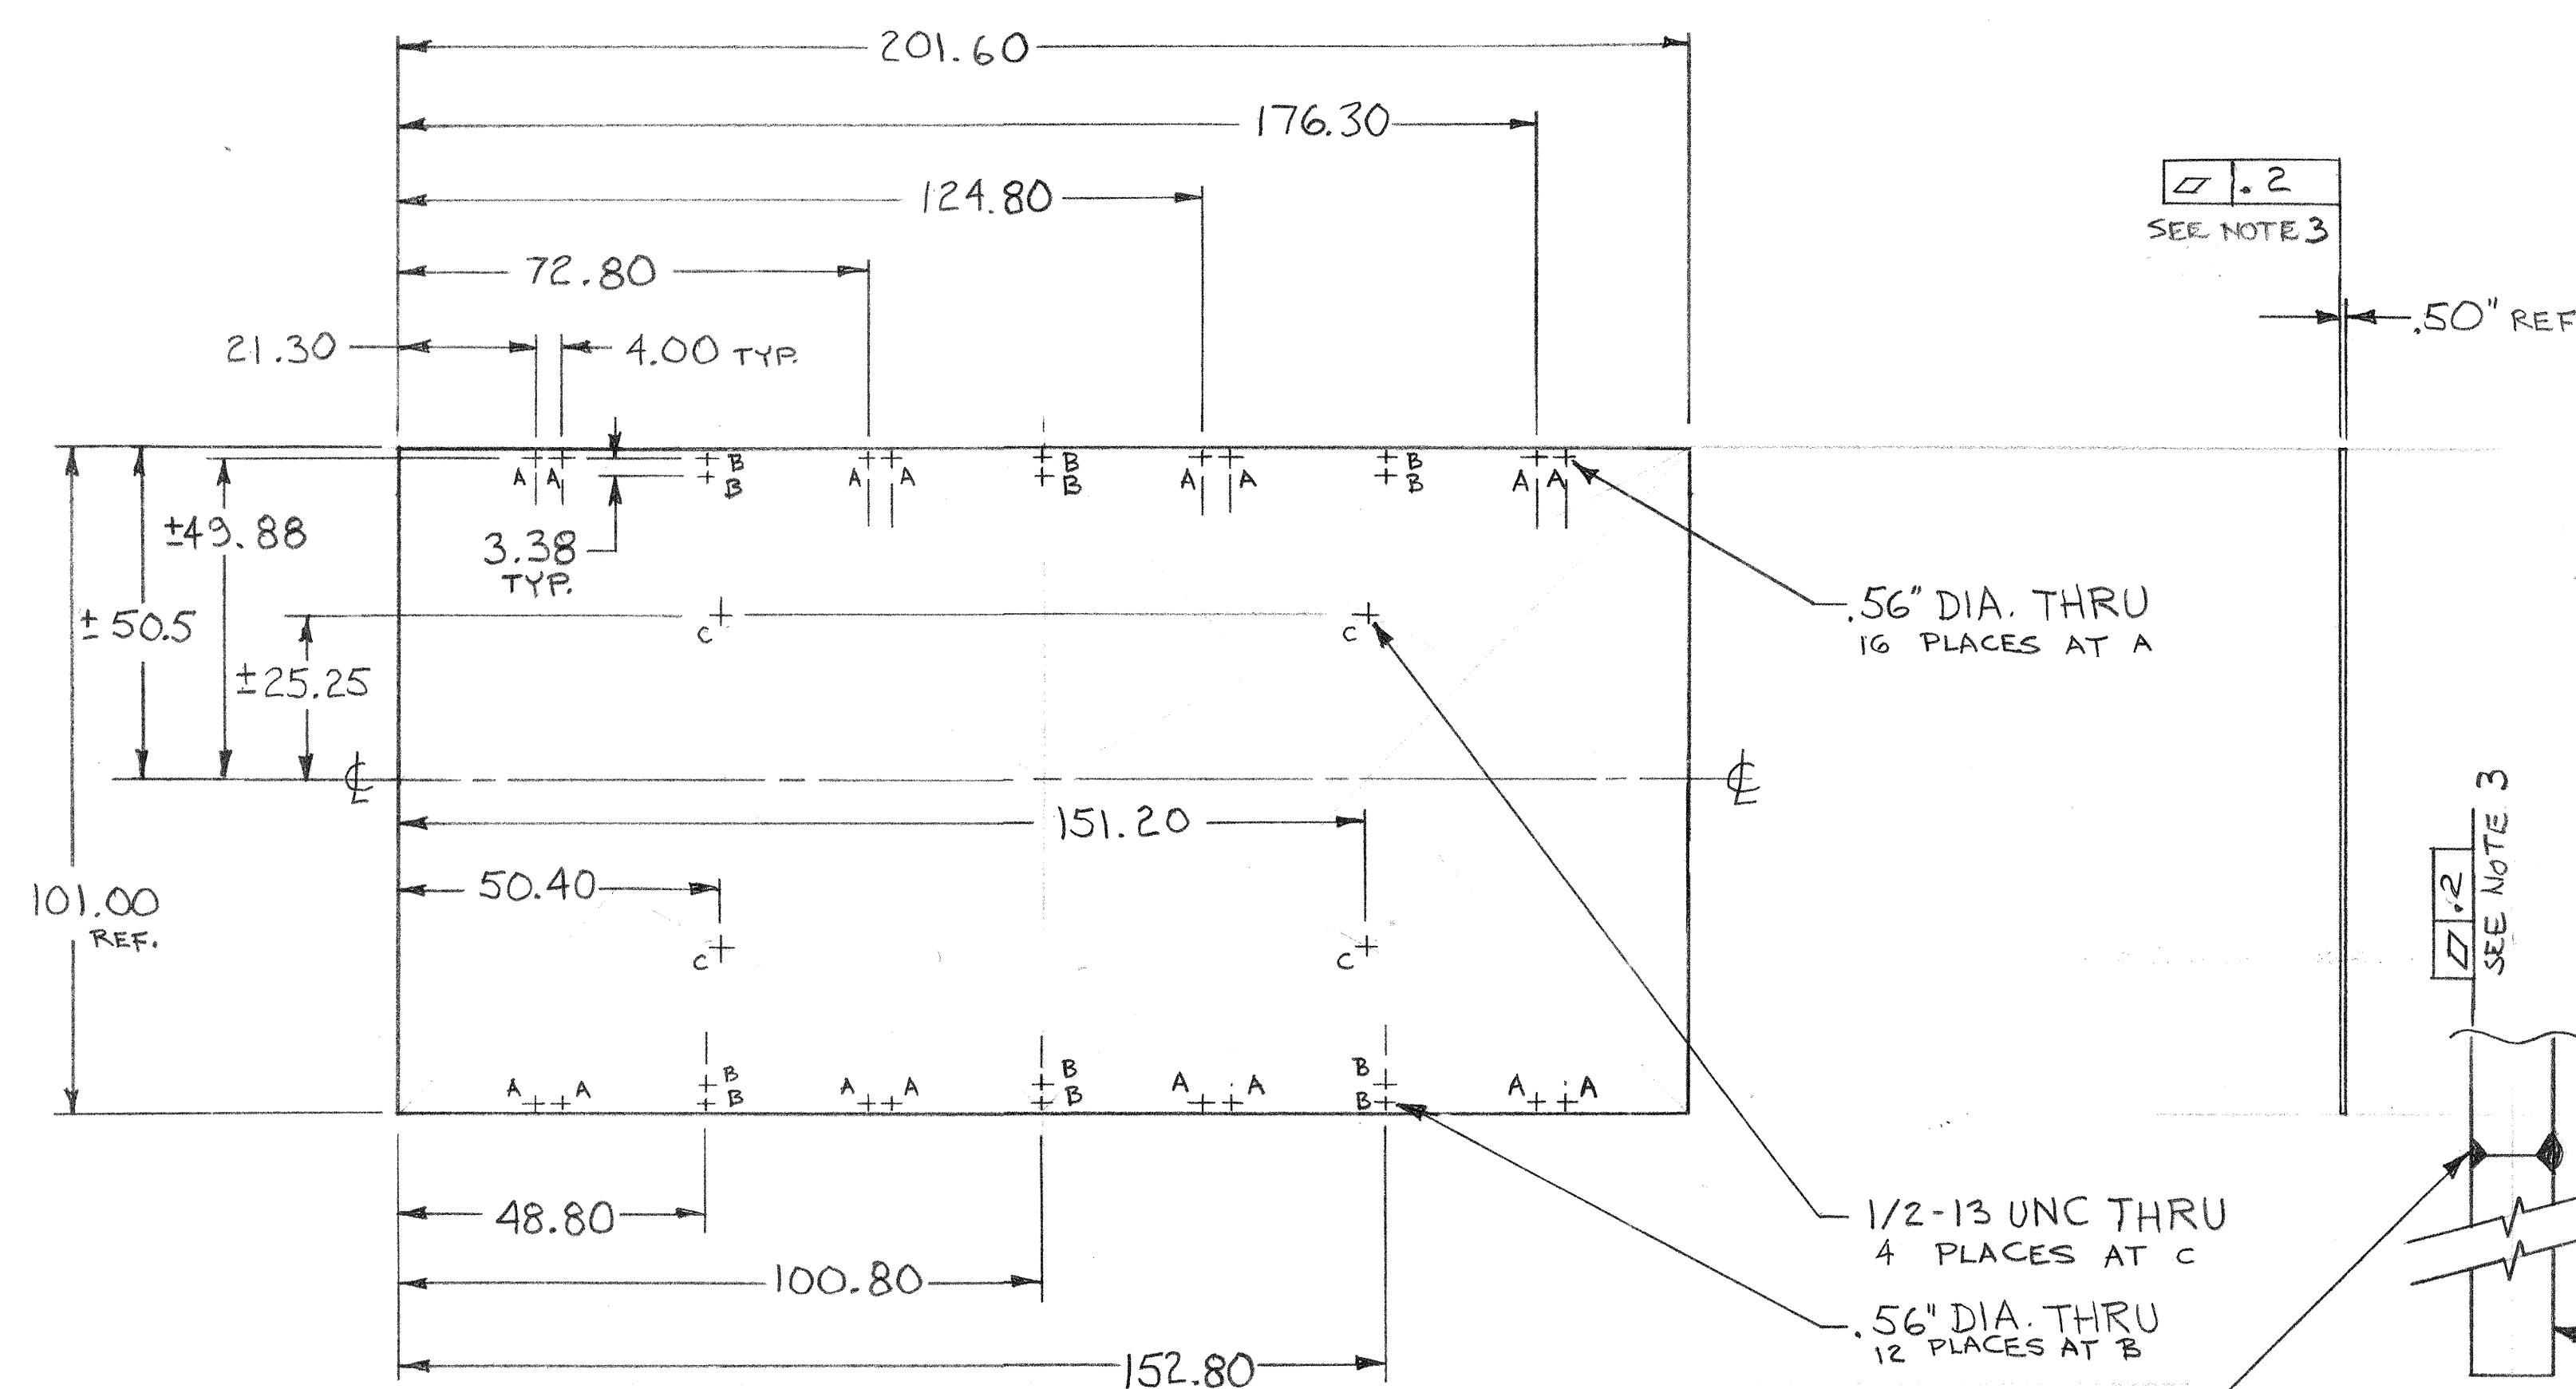
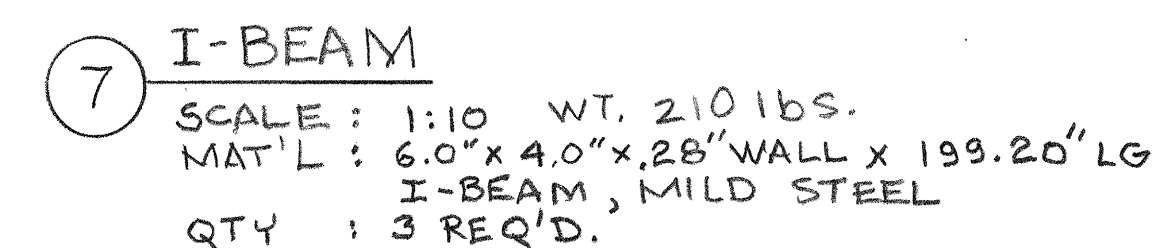
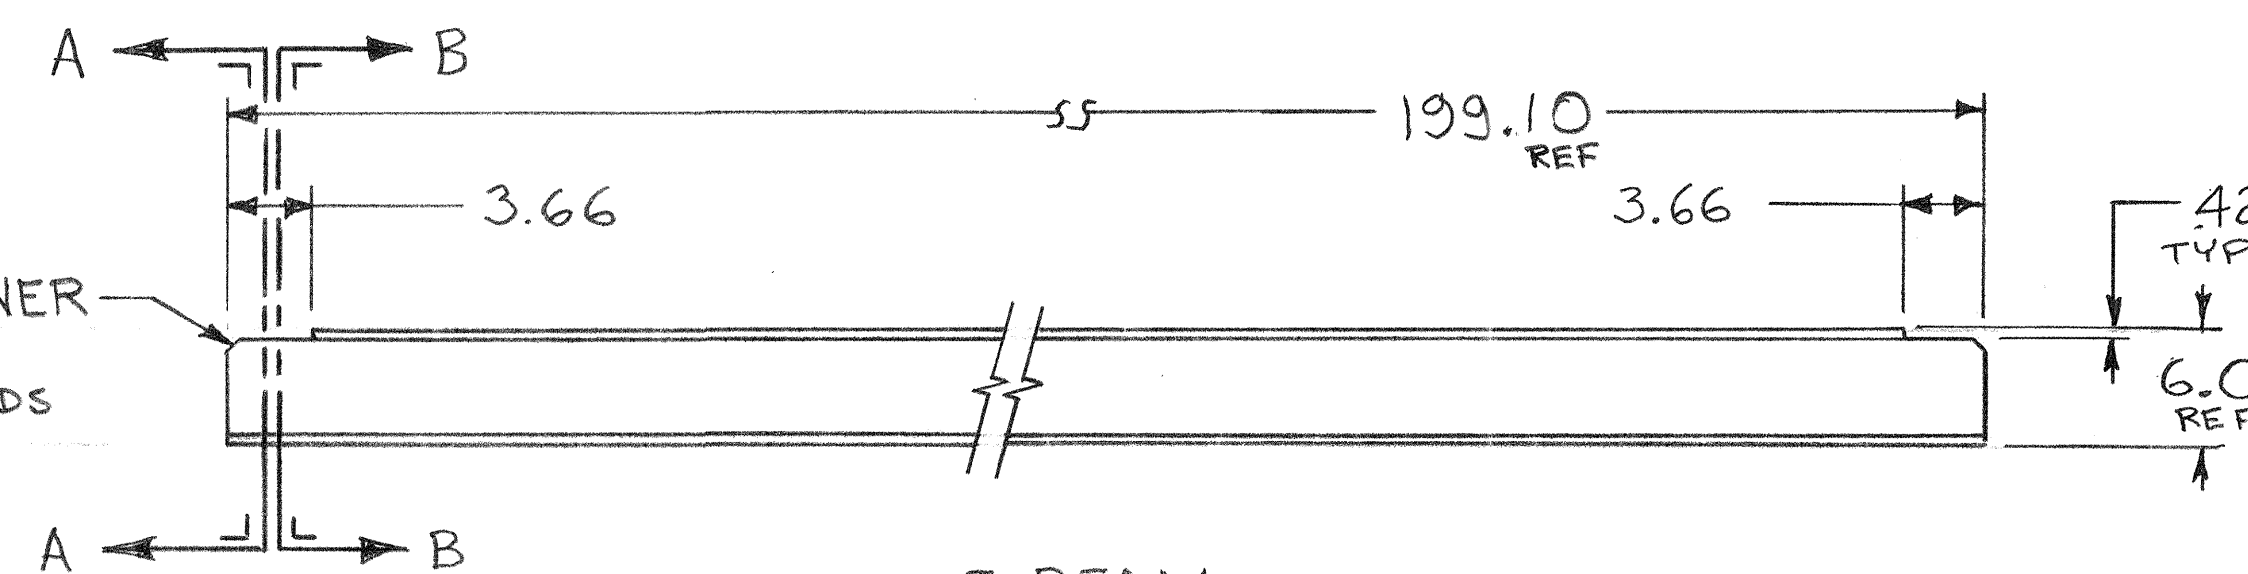
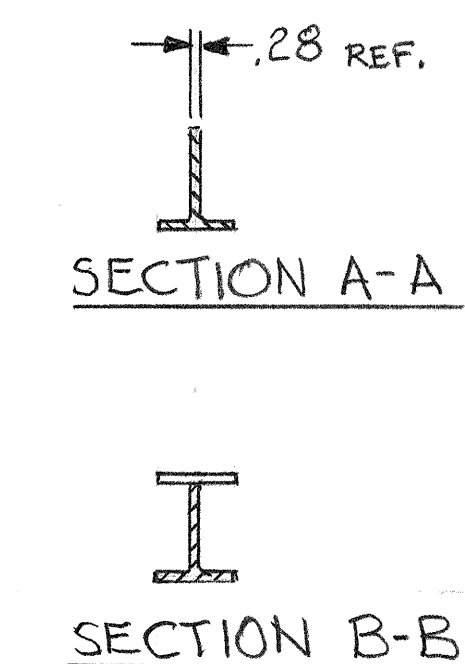


3. TAC WELDS TO COVER 50% OF PERIPHERY OR MORE.  
2. ALL TAPPED HOLES TO BE CLASS 2B OR BETTER.  
NOTES: 1. BREAK ALL SHARP EDGES 45° x .03"

|                                                                                            |                        |                               |                                                                                                                                                                                          |  |                         |    |                   |         |                                                               |
|--------------------------------------------------------------------------------------------|------------------------|-------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|-------------------------|----|-------------------|---------|---------------------------------------------------------------|
| <b>D</b><br>6052-309<br>CONT ON 2<br>REV. <b>B</b>                                         | ITEM                   | DWG. NO.                      | DESCRIPTION                                                                                                                                                                              |  | G1                      | G2 | G3                | REMARKS | REV.                                                          |
|                                                                                            | PRINT<br>DISTR.        | UNLESS OTHERWISE<br>SPECIFIED |  <b>Cornell University</b><br>Floyd R. Newman Laboratory of Nuclear Studies - Ithaca, NY 14853-5001 |  |                         |    |                   |         |                                                               |
|                                                                                            | CR-1<br>FMH            | DIMENSIONS ARE IN<br>INCHES   |                                                                                                                                                                                          |  |                         |    |                   |         |                                                               |
| TOLERANCES ON:<br>.0000 $\pm$ .005<br>.000<br>FRACTIONS<br>ANGLES $\pm$ 2°<br>ALL SURFACES |                        |                               | <b>CLEO II MAGNET YOKE SUPPORT</b><br><b>MUON SHIELD, BASE - DETAILS</b>                                                                                                                 |  |                         |    |                   |         |                                                               |
| CHECKED BY<br>APPROVED BY                                                                  | DRAWN BY<br><b>TMK</b> |                               | DRAWN FOR<br><b>NORDBERG</b>                                                                                                                                                             |  | DATE<br><b>12/17/86</b> |    | SCALE<br>AS NOTED |         | <b>D</b><br>6052-309<br>SH. NO. 2 CONT. ON 3<br>REV. <b>B</b> |